


## ENTRANCE MATTING SYSTEM CLEAN SYSTEM SCRUB

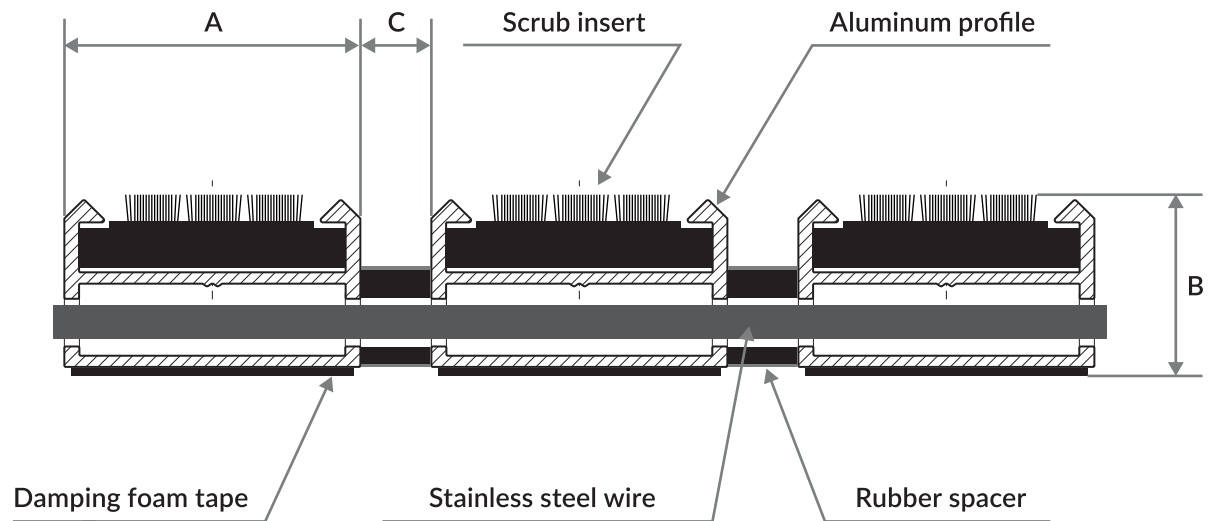

|                              | A [mm] | B [mm] | C [mm]  |
|------------------------------|--------|--------|---------|
| Clean System Scrub 12        | 30     | 16     | 3 - 4,5 |
| Clean system Scrub 17        | 30     | 20     | 3 - 4,5 |
| Clean system Scrub 22        | 30     | 24     | 3 - 4,5 |
| Clean System Scrub 27        | 31     | 29     | 3 - 4,5 |
| Clean system Scrub 22 strong | 32     | 24     | 3 - 4,5 |

### ■ PRODUCT SPECIFICATION:

Doormats Clean System Scrub are made of aluminum with Scrub insert. Profiles are coupled with stainless steel cord. Aluminum profiles are separate with rubber spacers. Construction allow us to easy roll for clearing and transporting the mat.

Free space between aluminum profiles can have between 3mm and 4,5mm.

Construction of doormats allow us to manufacture mats in any dimensions and shapes. Width of the mat is obtained as a result of cutting the profiles and length is obtained as a result of adding aluminum profiles and squeezing rubber spacers.

| Clean System Scrub  |  |
|---|--|
| Hygienic Certificate  | B-BK-60211-0449/19   |
| Anti-slip norm according to DIN 51130:2014  | R13  |
| Fire classification according to PN-EN 13501-1+A1:2010  | C <sub>fi</sub> - s1   |
| Declaration of performance  | CE   |
| Material of aluminum profile  | EN AW 6063 T6  |
| Stationary load   | 2 500 kg/100 cm <sup>2</sup> - standard version<br>3 400 kg/100 cm <sup>2</sup> - strong version |
| Environmental management system certificate   | ISO 14001:2015   |
| Scrub Insert  |  |
| Fibres PA6.6 with thickness   | 0,4 mm   |
| Brush/scrub profile with  | PP   |
| Stainless steel wire with thickness   | 0,7 mm   |
| According to Manufacturer Scrub insert meets the requirements of EU 2002/95/EC entered into force 01.07.2006 and it is manufactured in accordance with Directive ROHS 2002/95/EC. |  |